




Instructions for use - Circular sprinkler B

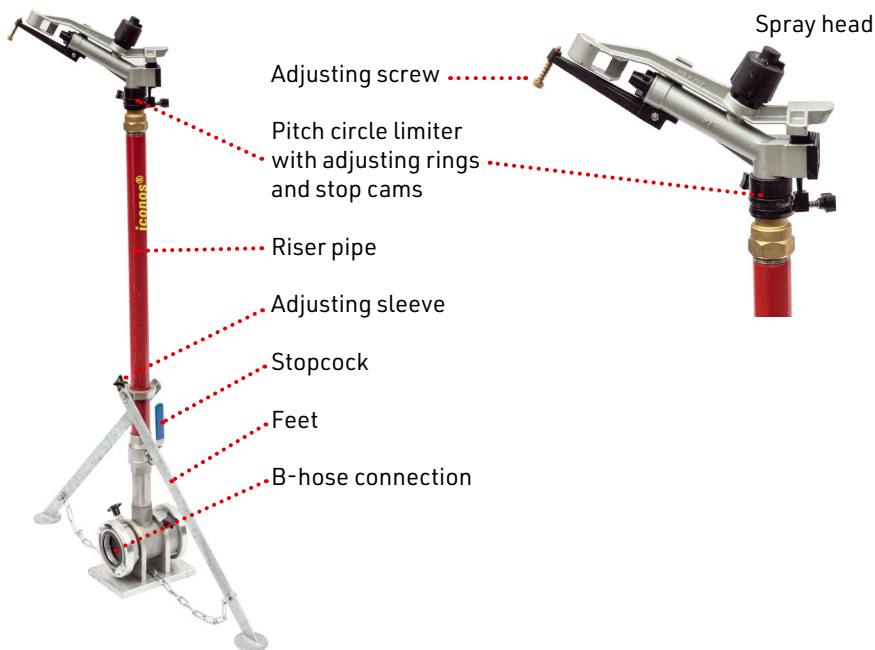


Get ready for use:

- ✓ Place the circular sprinkler on the ground and align the hose axle.
- ✓ Slide down the feet with adjusting sleeve until the chains are tight. Then tighten the sleeve again.
- ✓ Connect 20m B-hose on both sides in a row. Connect an iconos® end support or a 5 m B-hose to the last sprinkler to prevent it from tipping over.
- ✓ Roughly adjust the pitch circle limiter by pushing the adjusting rings with stop cams upwards and locking them in place. Turn the spray head to the left and right by hand and readjust the desired pitch circle. Then tighten the adjusting screws. Both adjusting rings downwards result in the full circle function.
- ✓ Slowly pressurize the extinguishing line with water and apply a maximum pressure of 4 - 5 bar.

The sprinklers can be switched off individually during operation via the built-in stopcock, and the spray jet jammer can be adjusted at the spray head on the front adjusting screw (brass).

After use:

After use, loosen the adjusting sleeve of the feet and push upwards until the chains are tight, then tighten again.

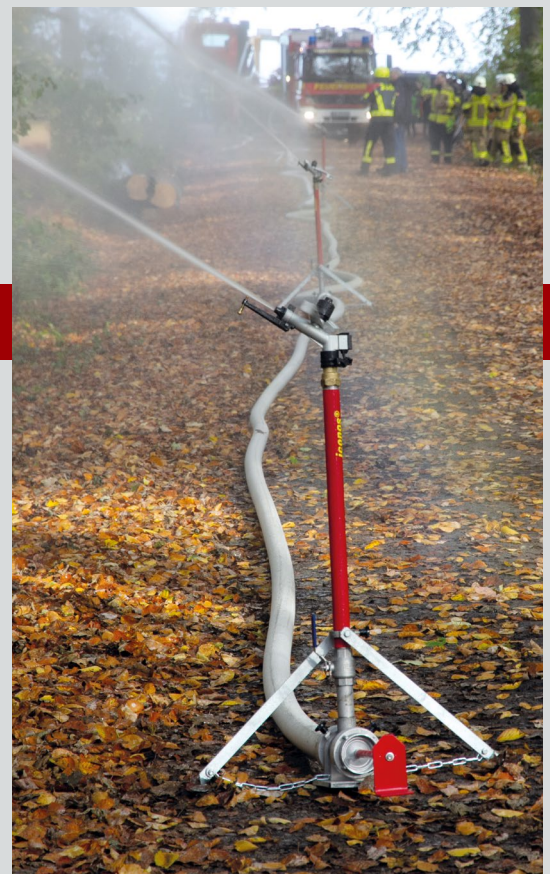

Circular sprinkler B position with iconos® End support (foreground) to stabilize the last circular sprinkler (application example).



iconos® End support prevents the last sprinkler in the row from tipping over.

Contact us

iconos® Vertriebs GmbH
Wacholderstraße 24-26
40489 Düsseldorf, Germany

Tel.: 0203-74 14 69 | Fax: 0203-74 17 20

Mail: info@iconos-system.com

[facebook.com/iconosgmbh](https://www.facebook.com/iconosgmbh)

www.iconos-system.com



Always secure the circular sprinkler against accidental tipping over